
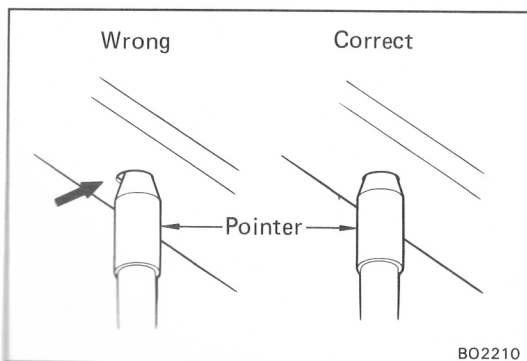
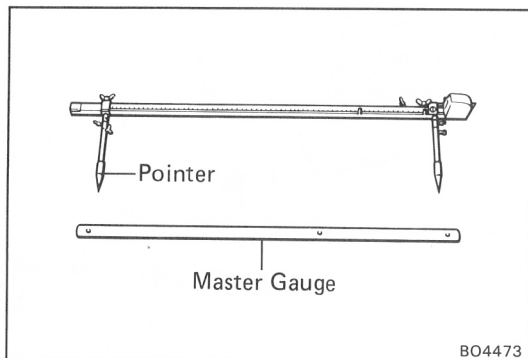
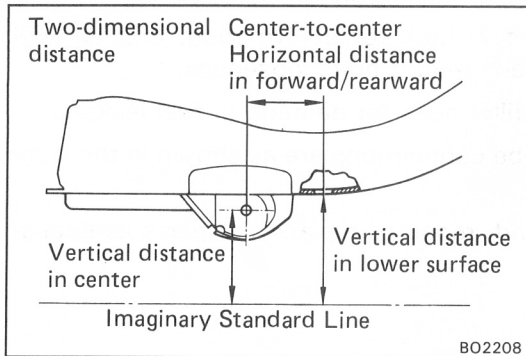


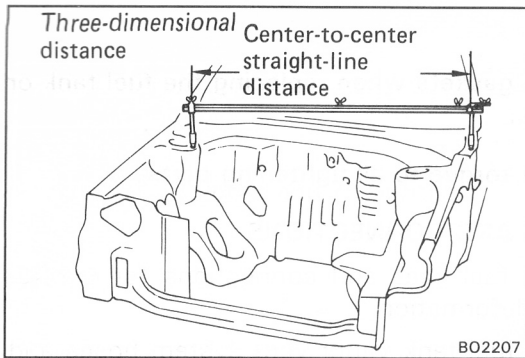

FRAME DIMENSIONS

General Information

1. BASIC DIMENSIONS

- (a) There are two types of dimensions in the diagram.
- (Three-dimensional distance)
- Straight-line distance between the centers of two measuring points.

(Two-dimensional distance)

- Horizontal distance in forward/rearward between the centers of two measuring points.
 - The height from an imaginary standard line.
- (b) In cases in which only one dimension is given, left and right are symmetrical.
- (c) The dimensions in the following drawing indicate actual distance. Therefore, please use the dimensions as a reference.


2. MEASURING

- (a) Basically, all measurements are to be done with a tracking gauge. For portions where it is not possible to use a tracking gauge, a tape measure should be used.
- (b) Use only a tracking gauge that has no looseness in the body, measuring plate, or pointers.

HINT:

1. The height of the left and right pointers must be equal.
2. Always calibrate the tracking gauge before measuring or after adjusting the pointer height.
3. Take care not to drop the tracking gauge or otherwise shock it.
4. Confirm that the pointers are securely in the holes.

THREE-DIMENSIONAL DISTANCE (LJ73 Series)


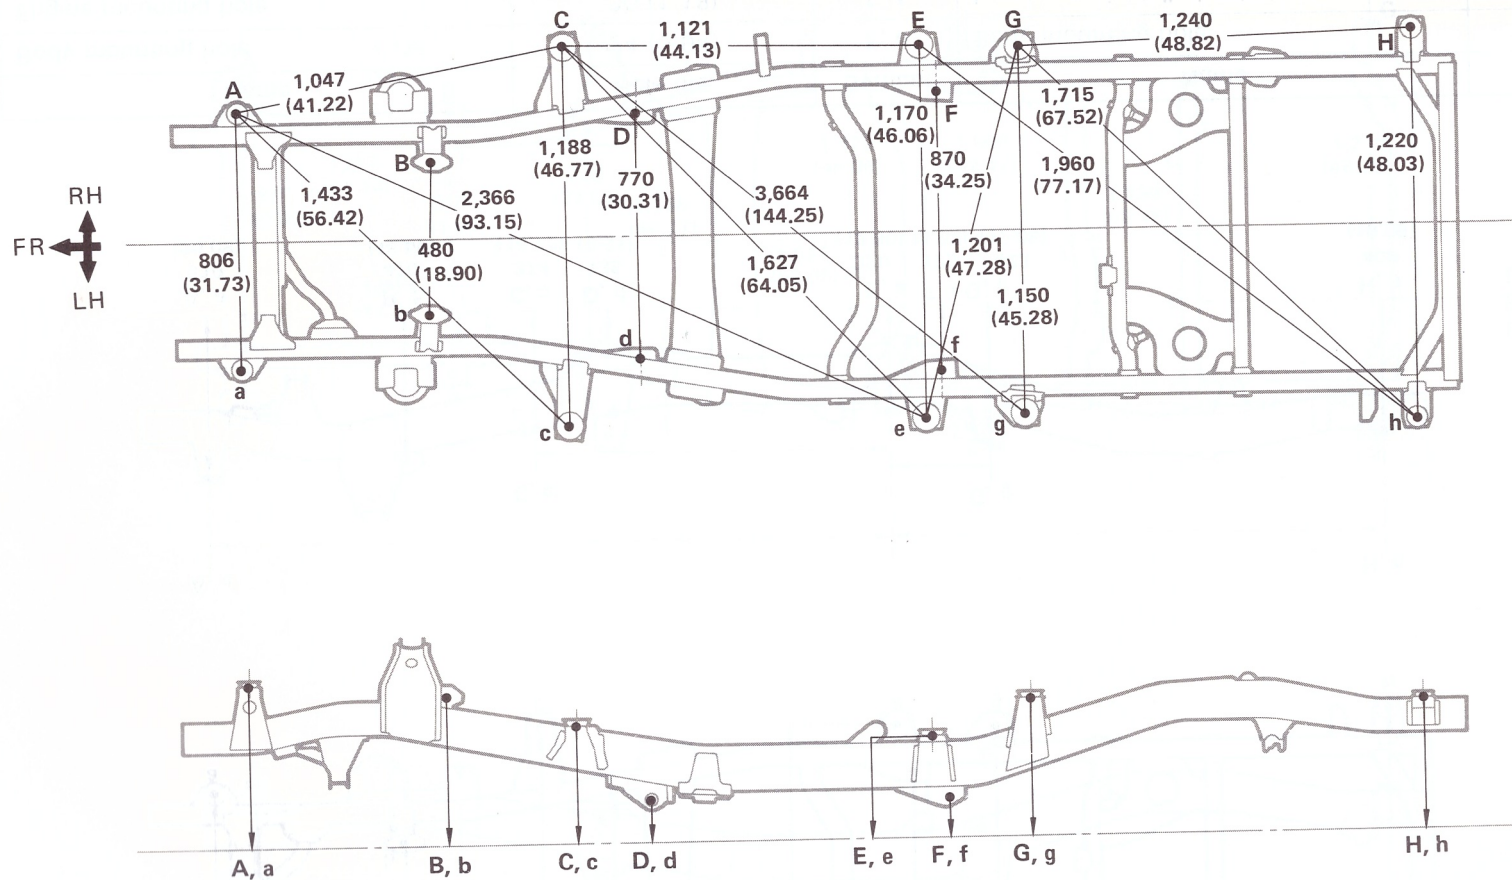


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	24 (0.94)
B, b	Engine mounting hole	30 (1.18)	F, f	Lower arm installation hole	18 (0.71)
C, c	Body mounting hole	24 (0.94)	G, g	Body mounting hole	24 (0.94)
D, d	Lower arm installation hole	18 (0.71)	H, h	Body mounting hole	24 (0.94)

TWO-DIMENSIONAL DISTANCE (LJ73 Series)


Wheel base 2,600 (102.36)

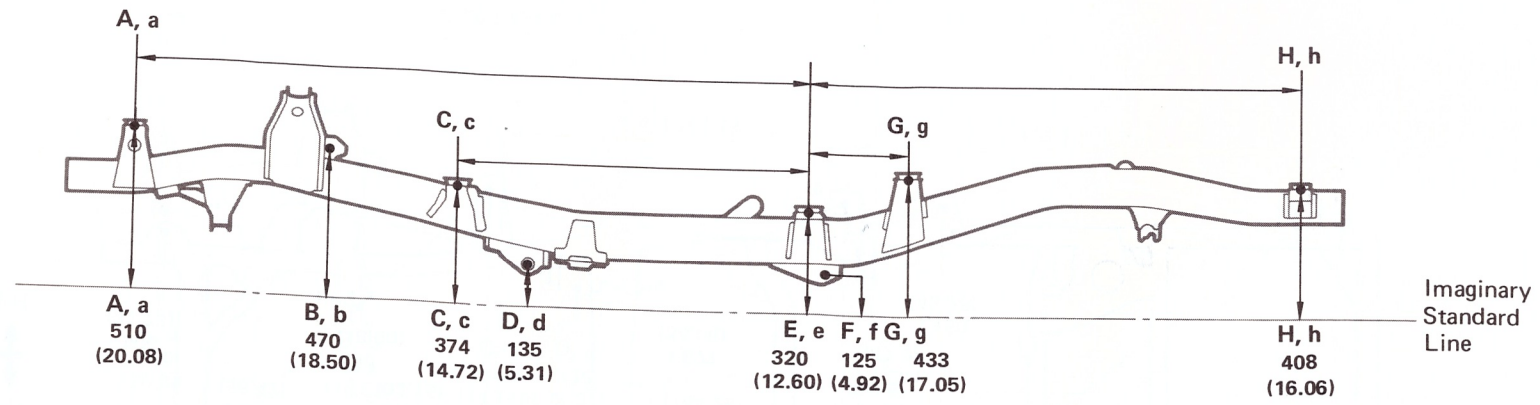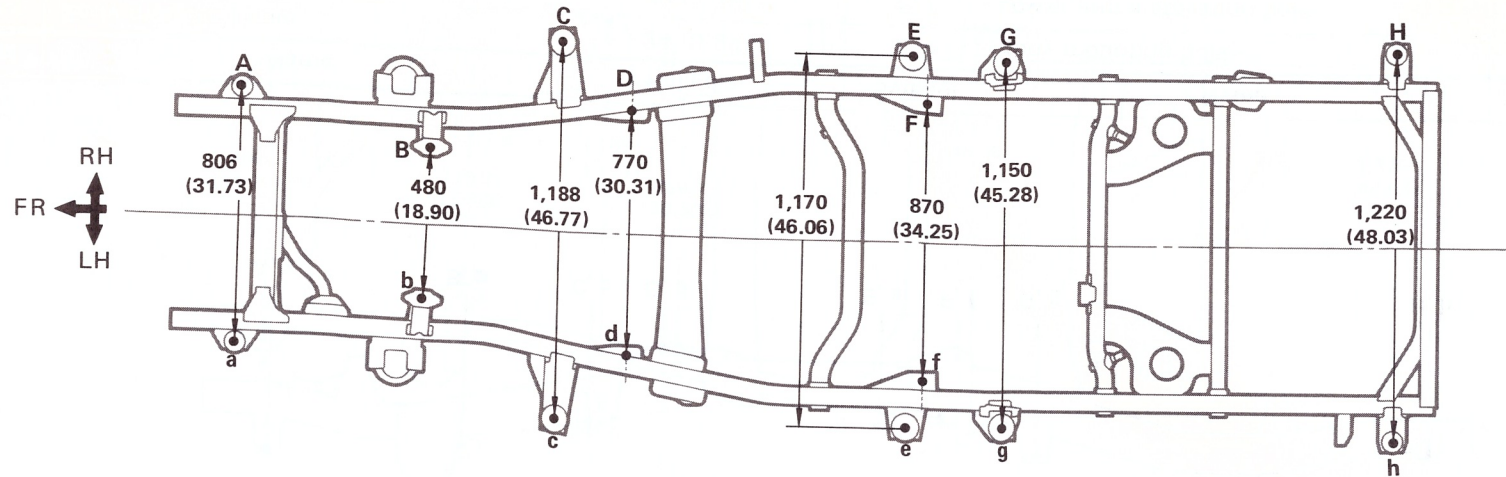

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	24 (0.94)
B, b	Engine mounting hole	30 (1.18)	F, f	Lower arm installation hole	18 (0.71)
C, c	Body mounting hole	24 (0.94)	G, g	Body mounting hole	24 (0.94)
D, d	Lower arm installation hole	18 (0.71)	H, h	Body mounting hole	24 (0.94)

BO5745


THREE-DIMENSIONAL DISTANCE (FJ73, PJ73, HZJ73, BJ73 Series)

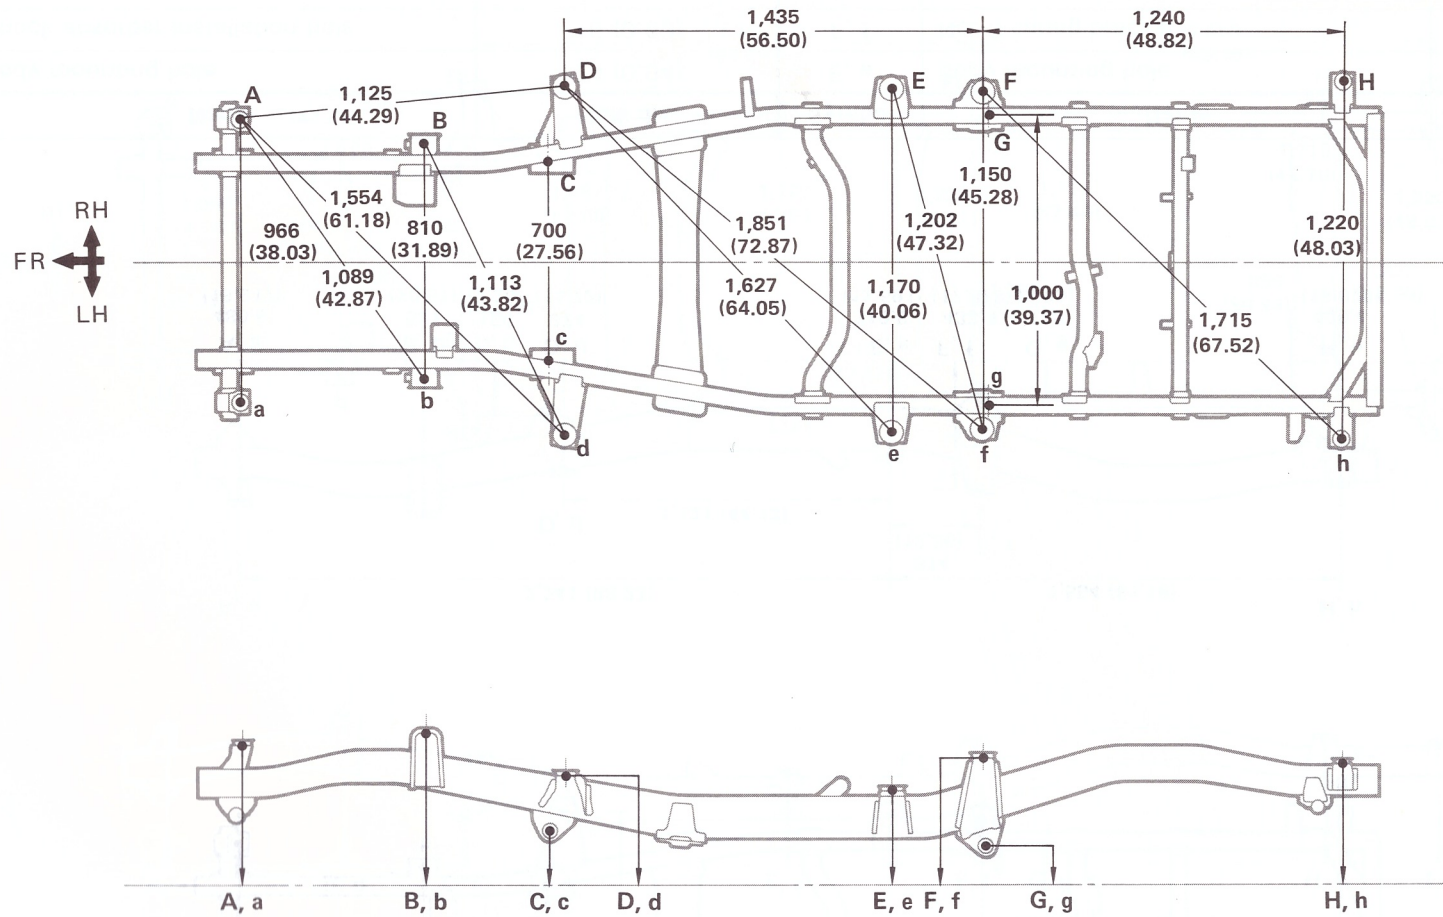

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)	F, f	No. 3 spring bracket	14 (0.55)
C, c	No. 2 spring bracket	14 (0.55)	G, g	Body mounting hole	24 (0.94)
D, d	Body mounting hole	24 (0.94)	H, h	Body mounting hole	24 (0.94)

TWO-DIMENSIONAL DISTANCE (FJ73, PZJ73, HZJ73, BJ73 Series)

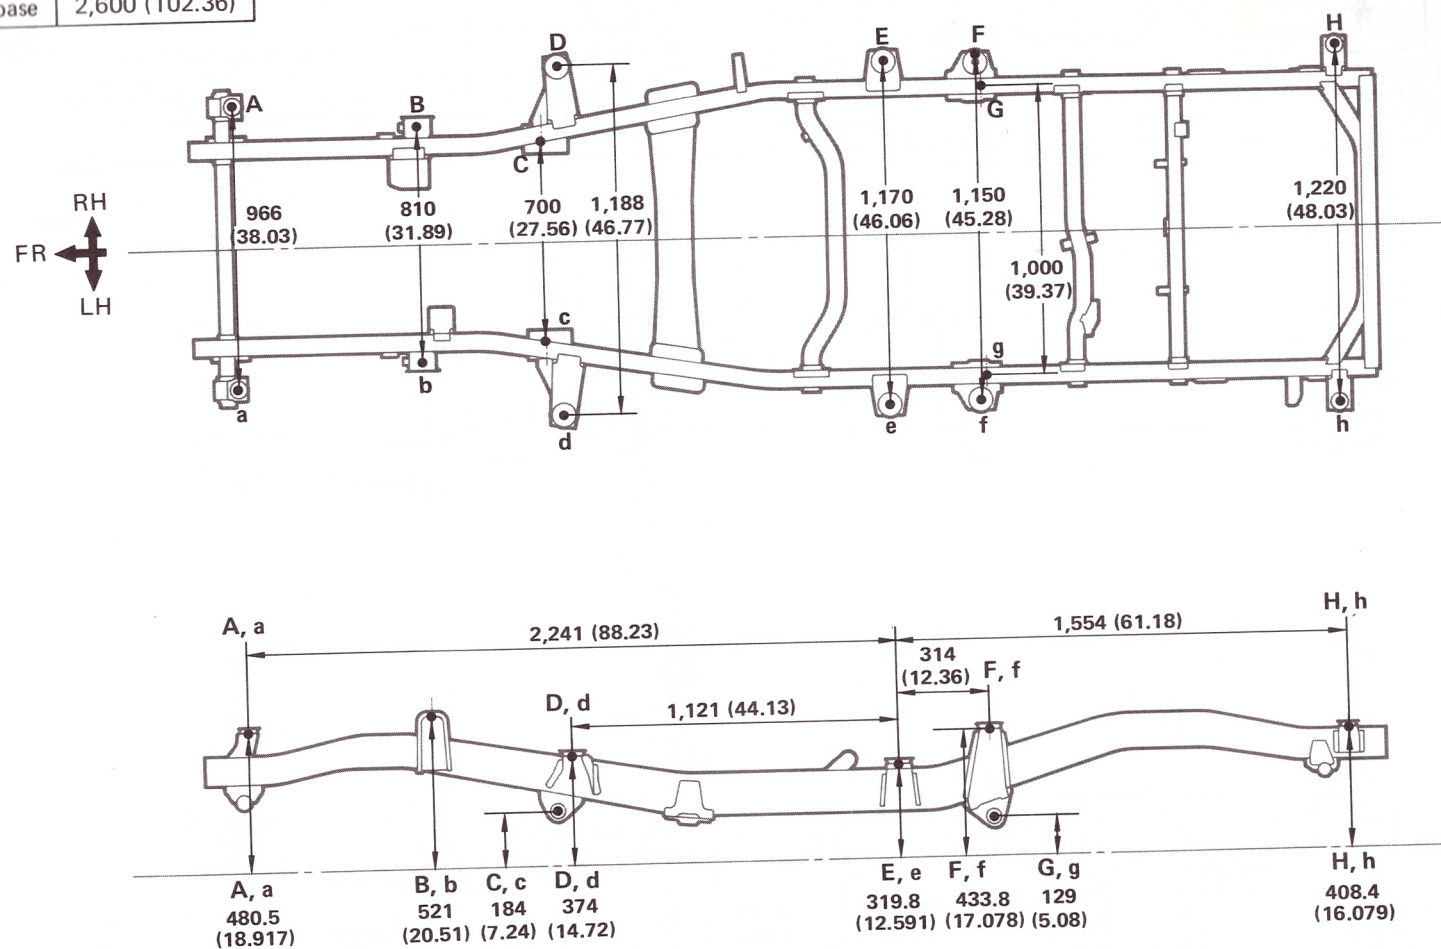

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	24 (0.94)
B, b	Shock absorber installation hole	16 (0.63)	F, f	No. 3 spring bracket	14 (0.55)
C, c	No. 2 spring bracket	14 (0.55)	G, g	Body mounting hole	24 (0.94)
D, d	Body mounting hole	24 (0.94)	H, h	Body mounting hole	24 (0.94)